

S8-144GANT

**N-type
Bifacial Dual Glass
Mono Module**

590 - 615W / Power Output

0~5W / Pmax Tolerance

23.25% / Maximum Module Efficiency



Outstanding Low Light Performance

Higher power output even under low-light environments like on cloudy or foggy days.

Better Temperature Coefficient

Higher power generation under working conditions, thanks to passivating contact cell technology

Lower LCOE

Higher bifaciality, higher power output and lower BOS cost

Wider Applicability

More application scenes like BIPV, vertical installation, snowfield, high-humid, windy and dusty area

10%-30% Additional Power Generation

30 years lifespan brings 10%-30% additional power generation comparing with conventional P-type module

Zero LID (Light Induced Degradation)

N-type solar cell has no LID naturally which can increase power generation


PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control

Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal)

Linear Performance Warranty

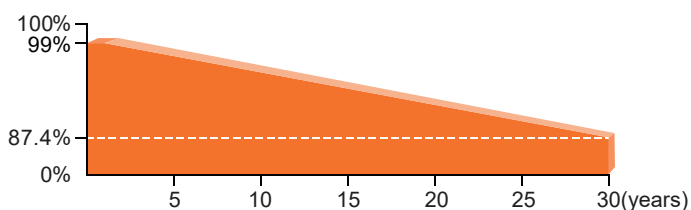

15 years

Product quality & process guarantee

30 years

Linear power guarantee

0.40 %

Annual degradation

Product Certification

ISO9001 : 2015: Quality Management System

ISO14001 : 2015: Environment Management System

ISO45001 : 2018: Occupational health and safety management systems

IEC61215, IEC61730, IEC62716



* Different markets have different certification requirements.

Also, the products are under rapid innovation.


Please confirm the certification status with regional sales representatives.

Aurora Pro

RS590~615S8-144GANT

Module Specification

Cell Type	144 [2 x (12 x 6)] / 182*94mm
Dimensions (mm)	2333*1134*30
Weight (kg)	32.5
Front Cover	2.0mm, Anti-Reflection Coating
Rear Cover	2.0mm, Heat Strengthened Glass
Junction Box	IP68 (3 diodes)
Cables	TUV 1x4.0mm ² , (+):300mm(-):300mm or Customized length
Connector Type	MC4-EVO2 / MC4 compatible

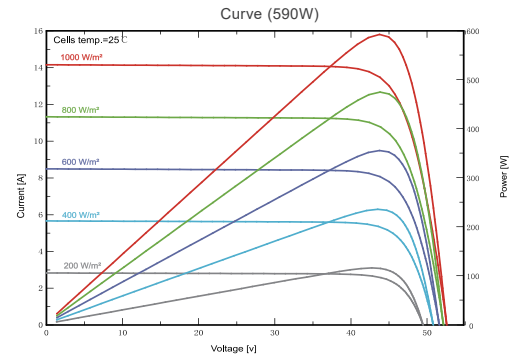

Electrical Specifications

Module Type	RS590S8-144GANT		RS596S8-144GANT		RS600S8-144GANT		RS605S8-144GANT		RS610S8-144GANT		RS615S8-144GANT	
	STC ¹	NOCT ²	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	590	451	595	455	600	459	605	463	610	467	615	471
Maximum Power Current (Imp/A)	13.56	11.07	13.63	11.13	13.70	11.18	13.77	11.24	13.84	11.30	13.91	11.35
Maximum Power Voltage (Vmp/V)	43.52	40.74	43.66	40.90	43.80	41.04	43.94	41.19	44.08	41.34	44.22	41.48
Short-circuit Current (Isc/A)	14.16	11.68	14.23	11.73	14.30	11.78	14.37	11.82	14.44	11.87	14.51	11.92
Open-circuit Voltage (Voc/V)	52.61	49.59	52.81	49.78	53.01	49.97	53.21	50.16	53.41	50.35	53.61	50.54
Module Efficiency (%)	22.30		22.49		22.68		22.87		23.06		23.25	

¹ STC: Irradiance 1000W/m², Cell Temperature 25°C, AM 1.5
² NOCT: Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Electrical Specifications(BNPI¹)

Nameplate Power (W)	590	595	600	605	610	615
Maximum Power (Pmax/W)	643	649	654	659	665	670
Maximum Power Current (Imp/A)	14.78	14.86	14.93	15.01	15.09	15.16
Maximum Power Voltage (Vmp/V)	43.52	43.66	43.80	43.94	44.08	44.22
Short-circuit Current (Isc/A)	15.43	15.51	15.59	15.66	15.74	15.82
Open-circuit Voltage (Voc/V)	52.61	52.81	53.01	53.21	53.41	53.61

¹ BNPI: Front radiation 1000W/m², Rear radiation 135W/m², Module temperature 25°C, AM=1.5

Temperature Characteristics


Nominal Operating Cell Temperature (NOCT/°C)	42±2
Temperature Coefficient of Pmax (%/°C)	-0.310
Temperature Coefficient of Voc (%/°C)	-0.26
Temperature Coefficient of Isc (%/°C)	+0.046

Packaging

Container	40HQ
Pallet Dimensions (mm)	2370*1130*2540
Pieces per Pallet	36
Pieces per Container	720

Operating Conditions

Operating Temperature (°C)	-40 to +85
Maximum System Voltage (V)	1500 DC (IEC)
Overcurrent Protection Rating (A)	30
Protection Class	Class II
Max. Test Load, Push/Pull (Pa)	Front 5400 / Back 2400

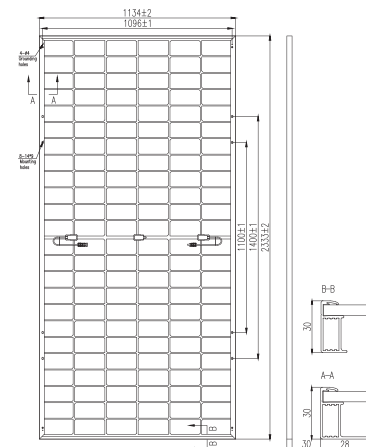

Yancheng Runda PV CO.,Ltd
 Add: No.199 Yanqiao Road, Tanghe Street, Jianhu County, Yancheng City Jiangsu Province, China
 Tel: +86-0510-83801000 E-mail: sales@rundapv.com Website: www.rundapv.com

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© 2024 Runda Solar All rights reserved. Contents included in this datasheet are subject to change without notice.
 No special undertaking or warranty for the suitability of special purpose or being installed in extraordinary surroundings is granted unless as otherwise specifically committed by manufacturer in contract document.