




Product Service

CERTIFICATE

No. Z2 098397 0004 Rev. 02

Holder of Certificate: **JIANGSU RUNDA PV WUXI CO., LTD**
No. 108 Yanxiang Road.
E Hu Town, Xishan Zone
214116 Wuxi, Jiangsu Province
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

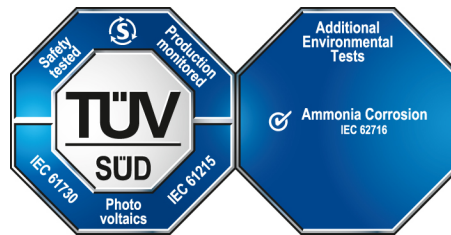

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
Mono & Poly Crystalline Silicon Photovoltaic (PV) Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704061901102-02

Valid until: 2026-07-26

Date, 2021-07-29

(Zhulin Zhang)

ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ CERTIFICADO ◆ CERTIFICAT

CERTIFICATE

No. Z2 098397 0004 Rev. 02

Model(s):

Mono series:

RSxxxM6-72 (xxx=340-400 in step of 5W)
 RSxxxM6-60 (xxx=285-330 in step of 5W)
 RSxxxM6-54 (xxx=255-300 in step of 5W)
 RSxxxM6-48 (xxx=230-265 in step of 5W)
 RSxxxM6-36 (xxx=170-200 in step of 5W)
 RSxxxS-144 (xxx=380-425 in step of 5W)
 RSxxxS-120 (xxx=320-355 in step of 5W)
 RSxxxS7-144 (xxx=425-455 in step of 5W)
 RSxxxS7-120 (xxx=355-380 in step of 5W)
 RSxxxS7-132 (xxx=390-415 in step of 5W)
 RSxxxS8-144 (xxx=535-550 in step of 5W)
 RSxxxS8-132 (xxx=490-500 in step of 5W)
 RSxxxS8-120 (xxx=445-455 in step of 5W)
 RSxxxS8-108 (xxx=400-410 in step of 5W)
 RSxxxS9-132 (xxx=635-665 in step of 5W)
 RSxxxS9-120 (xxx=580-605 in step of 5W)
 RSxxxS9-108 (xxx=520-545 in step of 5W)

Mono black series:

RSxxxM6B-72 (xxx=340-400 in step of 5W)
 RSxxxM6B-60 (xxx=285-330 in step of 5W)
 RSxxxM6B-54 (xxx=255-300 in step of 5W)
 RSxxxM6B-48 (xxx=230-265 in step of 5W)
 RSxxxM6B-36 (xxx=170-200 in step of 5W)
 RSxxxSB-144 (xxx=380-425 in step of 5W)
 RSxxxSB-120 (xxx=320-355 in step of 5W)
 RSxxxS7B-144 (xxx=425-455 in step of 5W)
 RSxxxS7B-120 (xxx=355-380 in step of 5W)
 RSxxxS7B-132 (xxx=390-415 in step of 5W)
 RSxxxS8B-144 (xxx=535-550 in step of 5W)
 RSxxxS8B-132 (xxx=490-500 in step of 5W)
 RSxxxS8B-120 (xxx=445-455 in step of 5W)
 RSxxxS8B-108 (xxx=400-410 in step of 5W)
 RSxxxS9B-132 (xxx=635-665 in step of 5W)
 RSxxxS9B-120 (xxx=580-605 in step of 5W)
 RSxxxS9B-108 (xxx=520-545 in step of 5W)

Poly series:

RSxxxP-72 (xxx=300-355 in step of 5W)
 RSxxxP-60 (xxx=250-295 in step of 5W)
 RSxxxP-54 (xxx=225-265 in step of 5W)
 RSxxxP-48 (xxx=200-235 in step of 5W)
 RSxxxP-36 (xxx=150-175 in step of 5W)
 RSxxxT-144 (xxx=330-360 in step of 5W)
 RSxxxT-120 (xxx=275-300 in step of 5W)
 xxx is standing for rated output power at STC.

Parameters:

Safety Class:	Class II
Max. System Voltage:	1500V DC
Construction:	Framed, with Junction box, cable and connector.
Fire Safety Class:	Class C according to UL790

Tested according to:

IEC 61215-1(ed.1)
 IEC 61215-1-1(ed.1)
 IEC 61215-2(ed.1)
 IEC 61730-1(ed.2)
 IEC 61730-2(ed.2)
 IEC 62716(ed.1)